

POWER & INDUSTRIAL SERVICES

HRSG Access Doors






Double Seal Wall Doors

Features & Benefits:

- Quick open & close without tools
- Maintenance free operation
- Insulation pan designed to sit nominally flush to inner liner to prevent flow disturbance
- Secondary heat barrier seal
- Safety features & latch designed for positive pressure environments
- Easy installation for new or retrofit
- Specialty grease-free hinges & handwheel adjustment assemblies

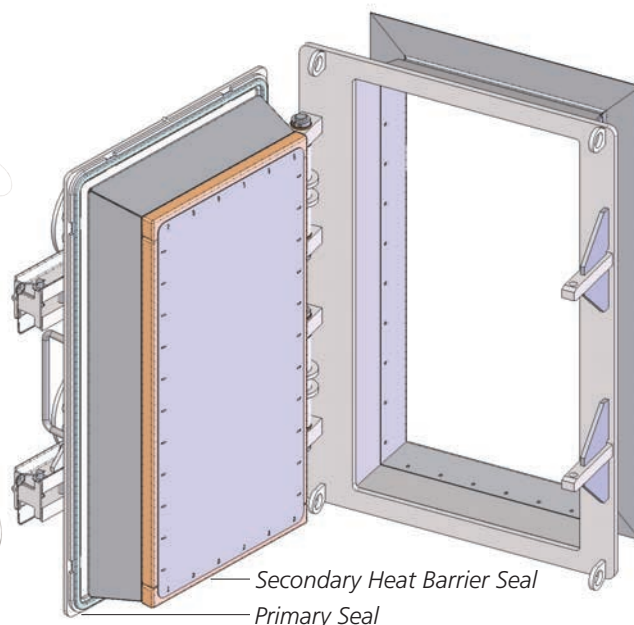

Standard Sizes

W	X	H	P&I #
18	X	24	8919
18	X	30	8919
24	X	24	8919
24	X	32	8919
24	X	36	8919
24	X	48	8919
30	X	60	8919

Custom Sizes Available

Operating Temperature 1800°F
Max. Excursion 2150°F

Casing Access Door

Rated $\pm 2150^{\circ}\text{F}$

Features & Benefits:

- Inconel wire mesh insulation pillow
- Carbon steel outer door plate
- 409 SS inner door plate and clips
- Hinged with locking dogs options
- Bolt on door option
- Any size insulation thickness
- Low-cost

Sizes

W	X	H	P&I #
18	X	18	8836
18	X	24	8836
18	X	30	8836
24	X	24	8836
24	X	30	8836
24	X	32	8836

Custom Sizes Available
Specify Insulation Thickness





Roof Ventilation & Access Door


Features & Benefits:

- Operating temperature up to 1800°F
- Excursion gas temperature up to 2150°F
- Various opening & closing options available (Handwheel, locking dogs, bolts)
- Hinged or unhinged
- Safety grate options
- Standard & custom sizes available

Sizes

W	X	H	P&I #
18	X	18	8909
18	X	24	8909
18	X	30	8909
24	X	24	8909
24	X	30	8909
24	X	32	8909


Specify Insulation Thickness

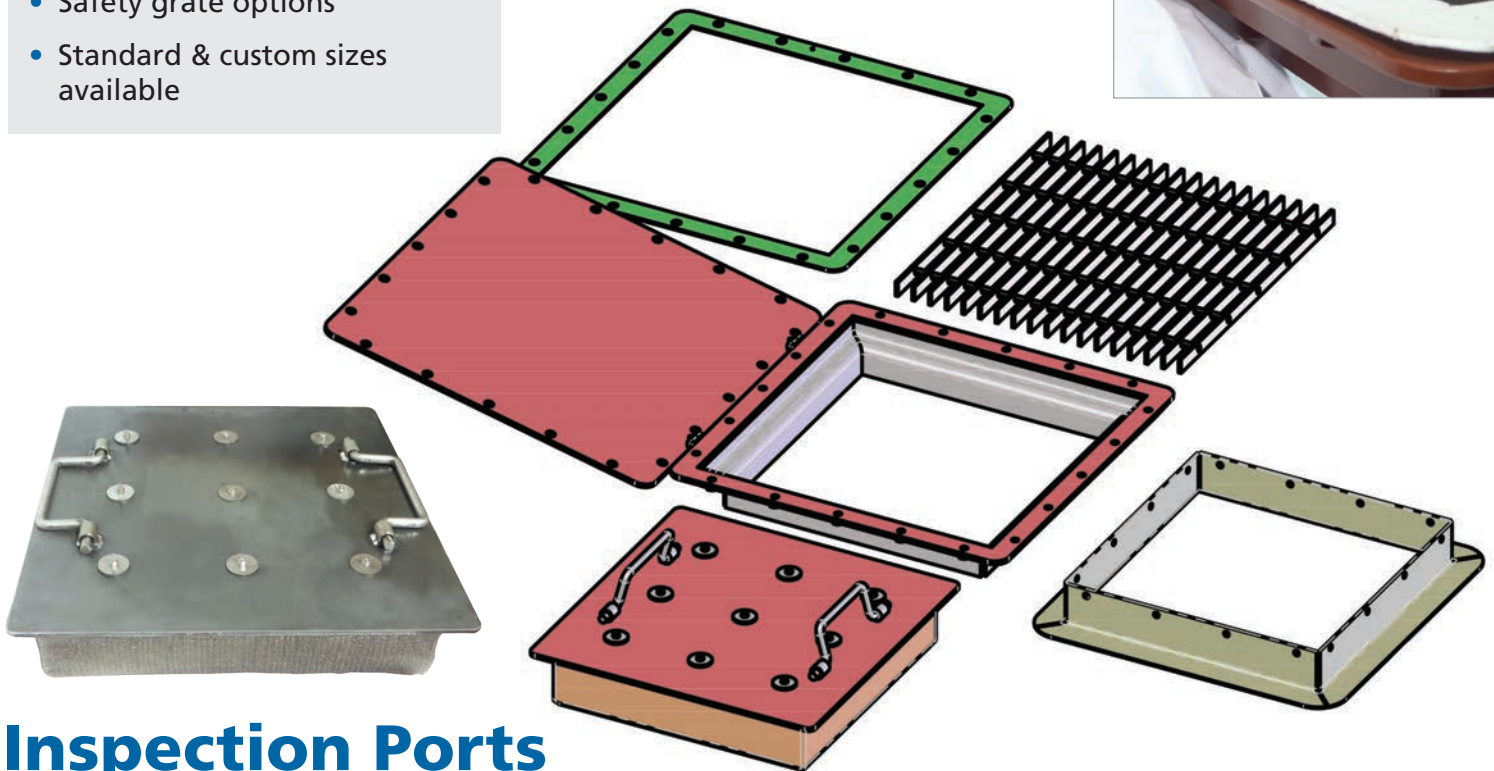

Inspection Ports

Features & Benefits:

- 309 stainless steel
- High temperature clear quartz glass
- Aspirating, purge, and seal air available
- Available in varying pressure and temperature ratings

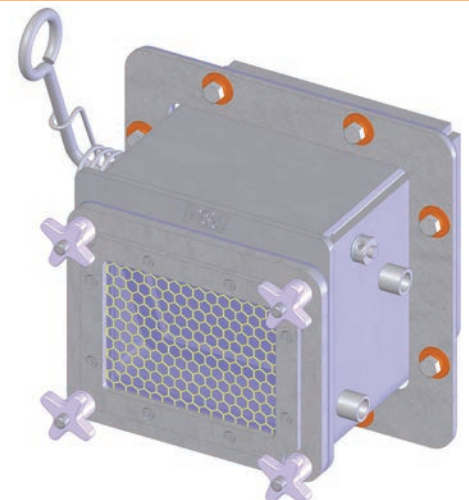



Heavy Duty Access Door

Adjustable Depth Insulation at $\pm 2"$

Features & Benefits:

- Fast delivery
- Seals rated to 2000°F Max
- Insulation depth from 4" to 14" +2" field adjustment for variations in wall thicknesses
- Double action "Grasshopper Leg" hinges allow compact wall footprint and to fully swing door away from the opening
- Lubrication-free graphite-bronze bushings and stainless steel hinge pins
- Quick opening dogs with brass strikes provides gas tight seals with easy adjustment

Standard Sizes

W	X	H	P&I #
16	X	16	8483
16	X	24	8858
16	X	30	8859
24	X	30	8867
24	X	48	8765
30	X	48	8481
32	X	40	8888
36	X	42	8789

Custom Sizes Available Specify Insulation Thickness

Operating Temps 1600°F
with 309L inner skin

Max. Temps. to 1800°F
with 253MA inner skin

